BADU® JET Stella

Powerful overhang unit with high gloss finish and LED lighting. For large pools. UV resistant, scratch and stain resistant.

Field of application
For expanding all pool models as an attraction, for fitness training, as a wave or bubble bath, for underwater massages (consult physician), for endless, no-turn swimming even in the smallest pool.

Design
Water is drawn in through the suction inlet at the bottom of the unit using a powerful pump and led back into the pool through a strong jet via two adjustable nozzles. The BADU JET Stella is equipped with an easy-care, high quality, wood-look design inlay.

Materials used
Housing .....ABS/PMMA
Interior parts .....PP/ABS/stainless steel Control elements .....ABS
Suction/pressure line .....PVC/ABS

Technical data at 50 Hz	21-81/33 G
Pump flow rate (m³/h)	75
Voltage	3 N~ 400/230
Power input P1/output P2 [1] (kW)	V 3.74/3.00
Number of nozzles (Ø 40 mm)	2
Flow pressure at nozzles (bar)	1.00
Flow velocity in centre 2 m from the nozzles (m/s)	1.40
Massage pressure (bar) max.	1.60
Multi-directional swivel nozzles (degrees)	60
Net weight (kg)	40.00

For more detailed information regarding the motor protection please see page 143.

Technical data may vary.

Article no	Description	Voltage	Power output P_2
231.9500.000	BADU JET Stella - white LED	3 N~ 400/230 V	3.00 kW
231.9520.000	BADU JET Stella - multicoloured LED	3 N~ 400/230 V	3.00 kW
231.9851.000	Telescopic foot for above ground pools		

The pumps in the counter swim units can be used for pool water with a salt concentration of up to 0.5 %, i.e. 5 g/l.
For higher salt concentrations please contact us.

^
>With white or multicoloured LED
>With design inlay as standard

75 m3/h

Dimensions

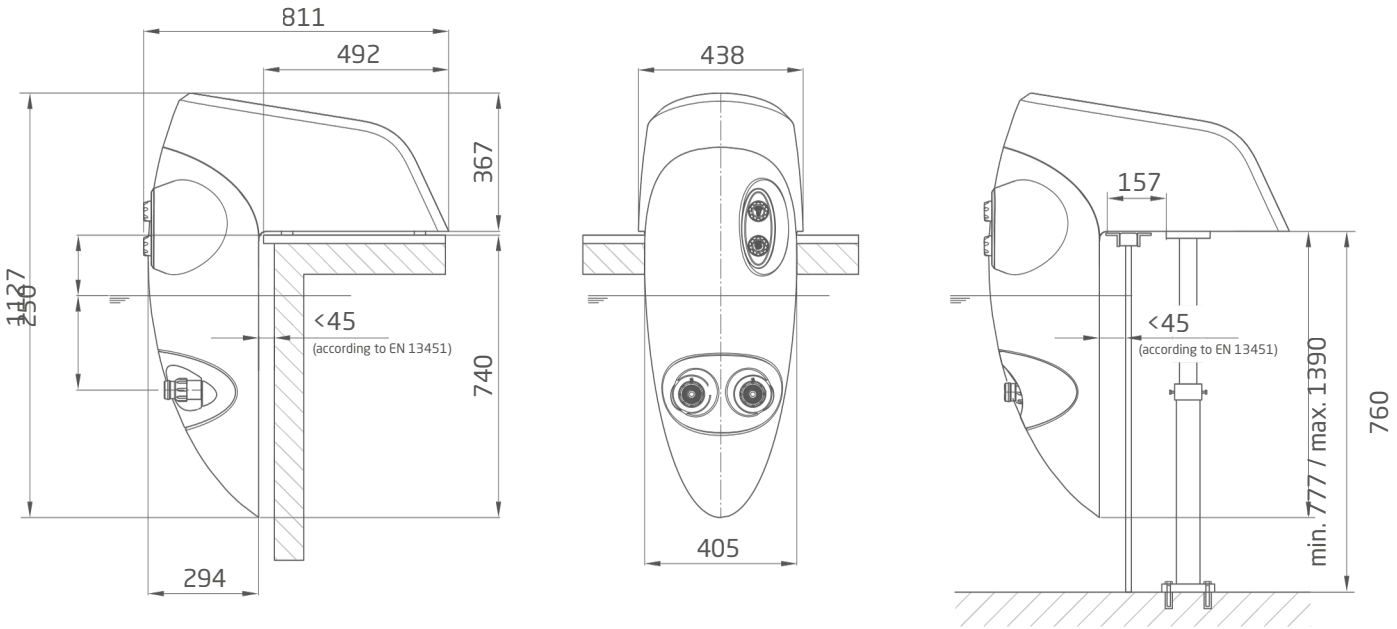

BADU® JET Stella

เครื่องว่ายทวนกระแส, แบบติดตั้งเสริม

เครื่องสร้างกระแสน้ำ ติดตั้งสะดวก ประสิทธิภาพสูง พร้อมผิวเงาเรียบหรูและไฟ LED เพิ่มบรรยากาศ ใช้ได้ดีกับสระขนาดกลาง ทนต่อแสงแดด รอยขีดข่วน ดูแลง่าย

ประเภทการใช้งาน

รองรับการใช้งานในสระทุกรูปแบบ ทั้งการออกกำลังกายในน้ำ การสร้างคลื่นหรือฟองอากาศ และการผ่อนคลายด้วยการนวดใต้น้ำ (แนะนำให้ปรึกษาแพทย์) พร้อมช่วยให้ว่ายน้ำแบบต่อเนื่องได้แม้พื้นที่สระมีจำกัด

วัสดุที่ใช้

ตัวเครื่อง (Main housing) .....ABS/PMMA
ส่วนประกอบภายใน (Interior parts) ....PP/ABS/stainless steel
ส่วนควบคุม (Control elements) .....ABS
อุปกรณ์ส่งแรงดัน (Suction/pressure line) .....PVC/ABS

การออกแบบ

ด้วยการใช้เทคโนโลยีสูบน้ำ น้ำจะถูกดูดเข้าทางช่องสูบน้ำด้านล่างของเครื่องด้วยปั๊มกำลังแรง ก่อนจะถูกส่งกลับลงสระผ่านกระแสน้ำที่แรงและสม่ำเสมอจากหัวฉีดที่ปรับทิศทางได้ BADU JET Stella มาพร้อมแผ่นตกแต่งลายไม้ที่ดูแลง่ายและให้ความรู้สึกพรีเมียม เหมาะกับการใช้งานทั้งเพื่อออกกำลังกายในสระและเพื่อการผ่อนคลาย

ข้อมูลทางเทคนิค ที่ 50 Hz	21-81/33 G
อัตราการไหล (m³/h)	75
แรงดันไฟฟ้า	3 เฟส 400/230
กำลังไฟฟ้า เข้า/ออก (kW)	V
จำนวนหัวพ่น (Ø 40 mm)	3.74/3.00
แรงดันที่หัวพ่น (bar)	2
อัตราการไหลของน้ำที่ระยะ 2 เมตรจากตัวเครื่อง (m/s)	1.00
แรงดันสำหรับการนวด (bar) สูงสุด	1.40
ทิศทางหัวฉีดปรับได้ (องศา)	1.60
น้ำหนัก (kg)	60
	40.00

ข้อมูลทางเทคนิคตามข้อกำหนดการทดสอบ

รายการ	รายละเอียดสินค้า	แรงดันไฟฟ้า	กำลังไฟออก
231.9500.000	BADU JET Stella - white LED	3 N~ 400/230 V	3.00 kW
231.9520.000	BADU JET Stella - multicoloured LED	3 N~ 400/230 V	3.00 kW
231.9851.000	Telescopic foot for above ground pools		

ปั๊มในอุปกรณ์ว่ายทวนกระแสน้ำ สามารถใช้ในน้ำเกลือที่มีค่าความเข้มข้นเกลือ สูงถึง 0.5% หรือ 5 g/l.
หากสระว่ายน้ำมีความเข้มข้นเกลือมากกว่านั้นกรุณาติดต่อเพื่อขอข้อมูลเพิ่มเติม

^
>With white or multicoloured LED
>With design inlay as standard
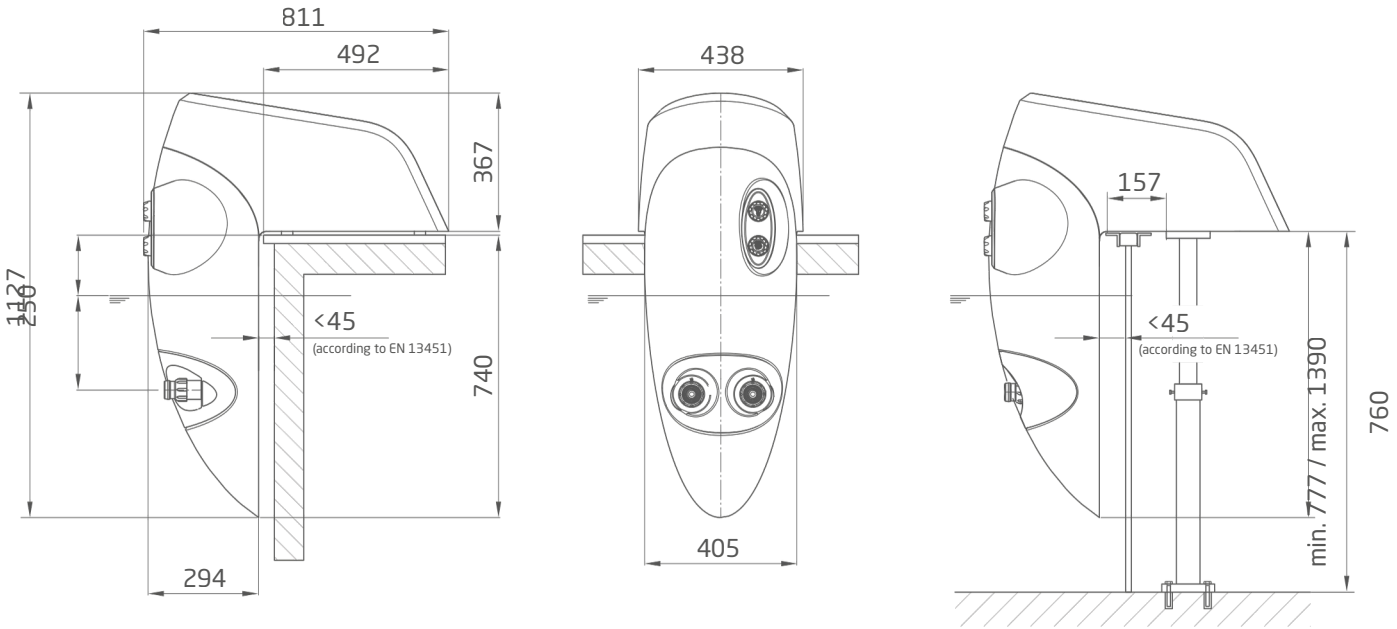
Dimensions